

SERIES 980

CENTER SLOTTED LINEAR



ONE, TWO OR THREE T8



Shown with optional side and top perforation

Application

- Indirect/Direct suspended lighting fixture; Indirect is 70% and direct is 30%.
- The direct component is controlled by 3" wide semi-specular aluminum baffles standard or opaque overlay (by others)
- This unit is designed for 3 lamp T8; 2 lamp T8 or 1 lamp T8.
- Fixture will also accept T8 LED tubes.
- Designed for low brightness illumination without shadows for general office or classroom applications where 85 to 90% efficiency is needed. All reflectors necessary for performance are supplied as standard.
- Fixture is 9-5/8" wide by 3-1/4" high.

LAMPING OPTIONS

T8

(1-3) 32W (4')
(2-6) 32W (8')

Finishes Available

- Unpainted/unfinished formed steel housings with center slotted openings. Customer to source a local powder coating facilities to paint steel housings and die cast aluminum end caps. An internal ballast bracket assembly is included with precoated white steel and shipped as an assembly with lamp holder brackets and adjustable ballast mounting.
- Reflectors are enhanced aluminum for maximum efficiency for direct and indirect control.

PACKAGING

4'

8'

BODIES PER SKID

32

32

Features

- Fixtures are shipped with die cast aluminum joiners for structural integrity and suspension continuity.
- Fixtures are designed to mount on exact 4 foot and 8 foot centers. Joiners will accept stems, single cable, "V" cable, and power cords as supplied by others.
- Architectural ends. This die cast aluminum end comes standard with flat styled configuration. They are bolted to the die cast joiners for a complete architectural look.
- Housing can be differentiated by specifying perforations on the bottom sides parallel to the center slot or perforations on the top sides or both. You design the look that you want to achieve.
- Fixture can be modified for LED "circuit on board" applications and will accept daylight and/or motion detectors.

Optional Features

- Contact factory for any optional features or differentiations

Specifications subject to change without notice.








Adam Metal Products Company • P.O. Box 450 • Ledgewood, NJ • 07852
Phone: 973.770-1100 • Fax 973.770-1105 • www.adammetal.com



SERIES 980




CENTER SLOTTED LINEAR

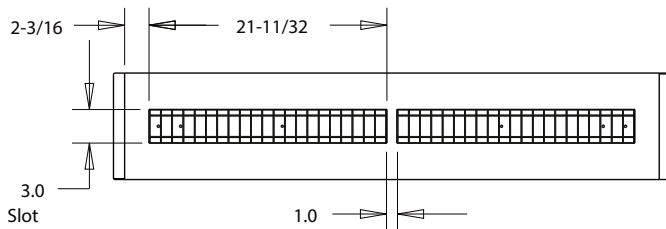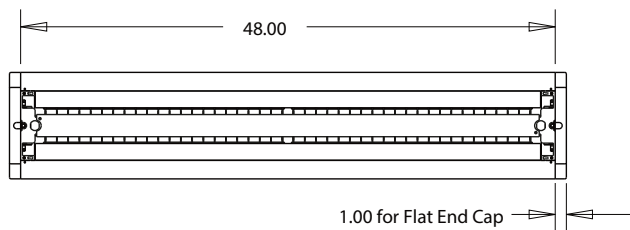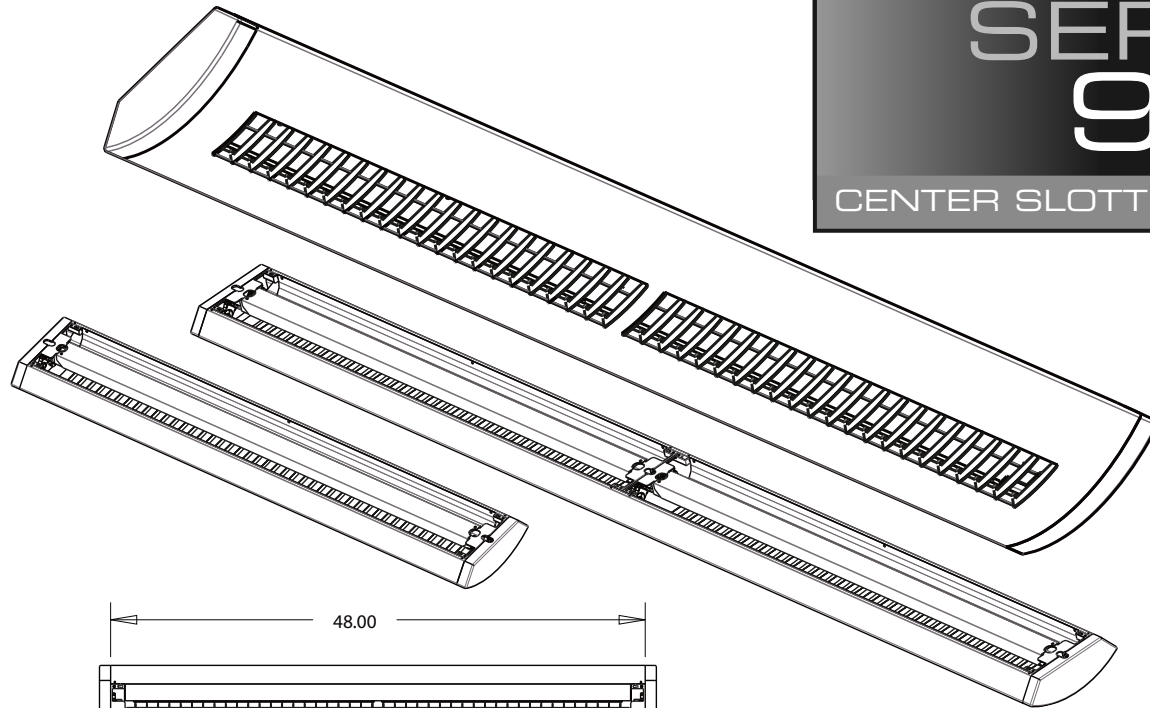

T8	
SIZE	LENGTH
(1 to 3) 32W	48
(2 to 6) 32W	96

Add 1" for each end cap

Specifications subject to change without notice.

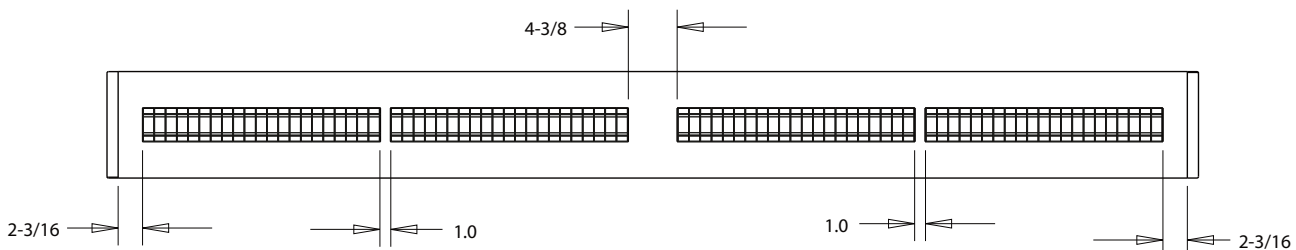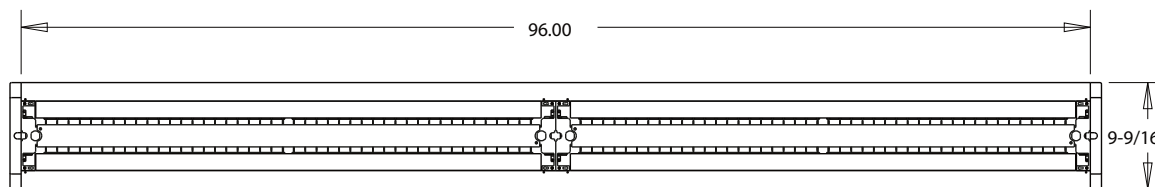

REV 9-10-2012



Adam Metal Products Company • P.O. Box 450 • Ledgewood, NJ • 07852
Phone: 973.770-1100 • Fax 973.770-1105 • www.adammetal.com





Adam Metal Products Company

Series 950 / 980 Center Slotted Linear 4-foot Assembly Instructions

950 / 980 4ft ASSEMBLY

HARDWARE LIST (by others)

- (A) 8-32 X 1/4" Long Machine Screw (4 Pcs.)
- (B) 1/4 - 20 X 3/4" Long Allen Head Screw (4 Pcs.)
- (C) #8 X 1/4" Screw (6 Pcs.)

ASSEMBLY INSTRUCTIONS

- 1.) Mount End Cap to Body with (B)
- 2.) Insert Baffle Assembly (Snaps into 3" slots)
- 3.) Install both Side Reflectors with (C)
- 4.) Install Ballast Assembly with (A).

NOTE:

Peel off all protective coating on reflectors.


NOTE:

If running continuous string of bodies, connect bodies together with (B) to each Joiner. At the end of the run mount End Cap. Make sure each Joiner has a suspension system.

All suspension systems to be supplied by others.

Warning:

Each Joiner must have a suspension system.

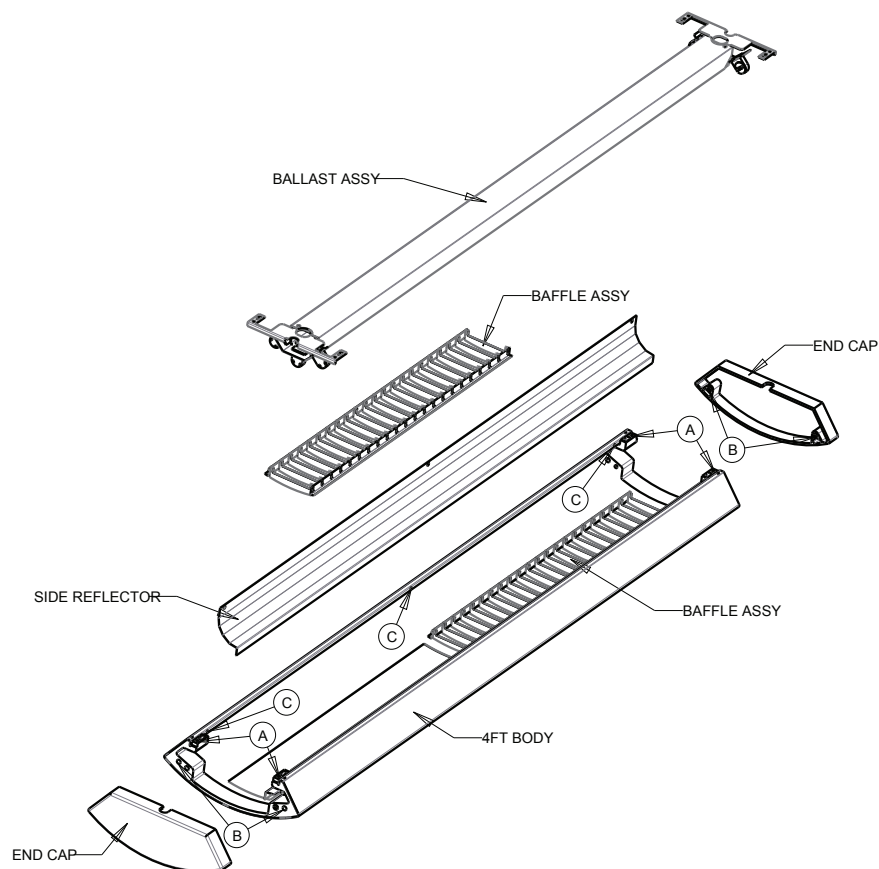

NOTE:

When attaching the Bodies together for continuous runs use the inside holes on the Joiner.



Adam Metal Products Company • P.O. Box 450 • Ledgewood, NJ • 07852
Phone: 973.770.1100 • Fax: 973.770.1105 • www.adammetal.com





Adam Metal Products Company

Series 950 / 980 Center Slotted Linear 8-foot Assembly Instructions

950 / 980 8ft ASSEMBLY

HARDWARE LIST (by others)

- (A) 8-32 X 1/4" Long Machine Screw (4 Pcs.)
- (B) 1/4 - 20 X 3/4" Long Allen Head Screw (4 Pcs.)
- (C) #8 X 1/4" Screw (6 Pcs.)

ASSEMBLY INSTRUCTIONS

- 1.) Mount End Cap to Body with (B)
- 2.) Insert Baffle Assembly (Snaps into 3" slots)
- 3.) Install Side Reflectors with (C)
- 4.) Install Ballast Assembly with (A).

NOTE:

Peel off all protective coating on reflectors.


NOTE:

If running continuous string of bodies, connect bodies together with (B) to each Joiner. At the end of the run mount End Cap. Make sure each Joiner has a suspension system.

All suspension systems to be supplied by others.

Warning:

Each Joiner must have a suspension system.

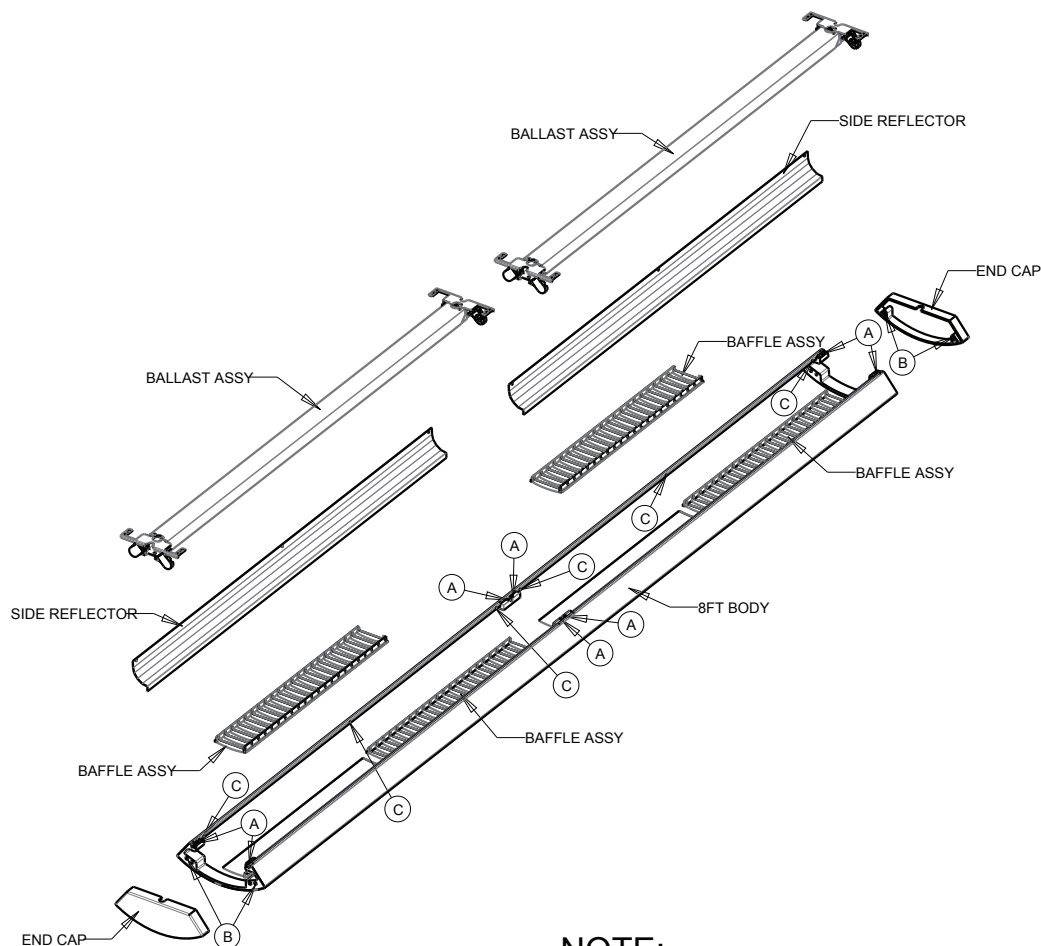

NOTE:

When attaching the Bodies together for continuous runs use the inside holes on the Joiner.

MADE IN THE




Adam Metal Products Company • P.O. Box 450 • Ledgewood, NJ • 07852
Phone: 973.770.1100 • Fax: 973.770.1105 • www.adammetal.com





Adam Metal Products Company

Series 950 / 980 Center Slotted Linear Ballast Assembly Instructions

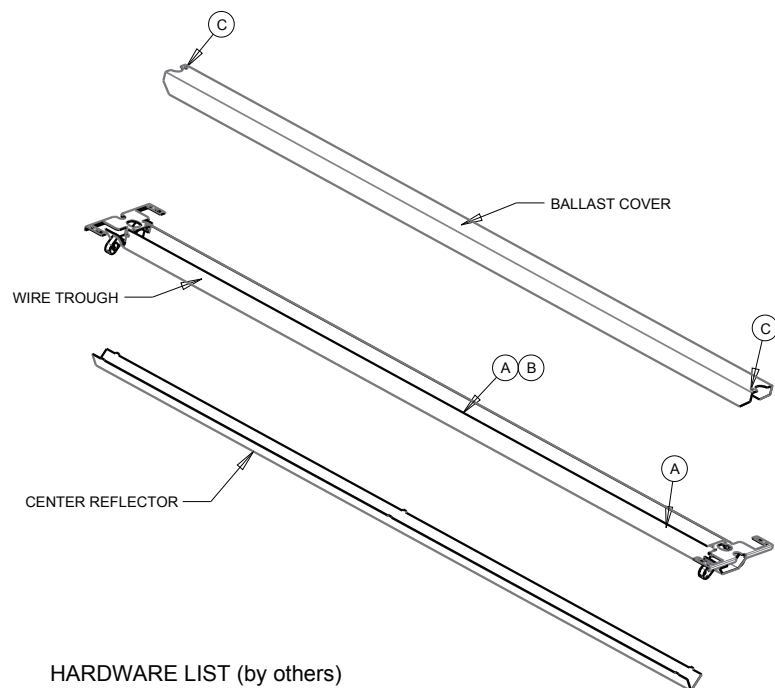

HARDWARE LIST (by others)


- (A) 8-32 Capped Washer Type Lock Nut (3 PCS)
(Palnut Company Cat.# D0832075)
- (B) 8-32 X 3/8" Long Screw
- (C) #8 X 1/4" Screw

RECOMMENDED SOCKETS

600V T5/G5
Vossloh Schwabe - 108660
Stucchi - 268
BJB - 26.620.2004.50
Etlin Daniels - FL622-L

600V T8
Vossloh Schwabe - 108331 (RH)
Vossloh Schwabe - 108328 (LH)

950 / 980 BALLAST ASSEMBLY

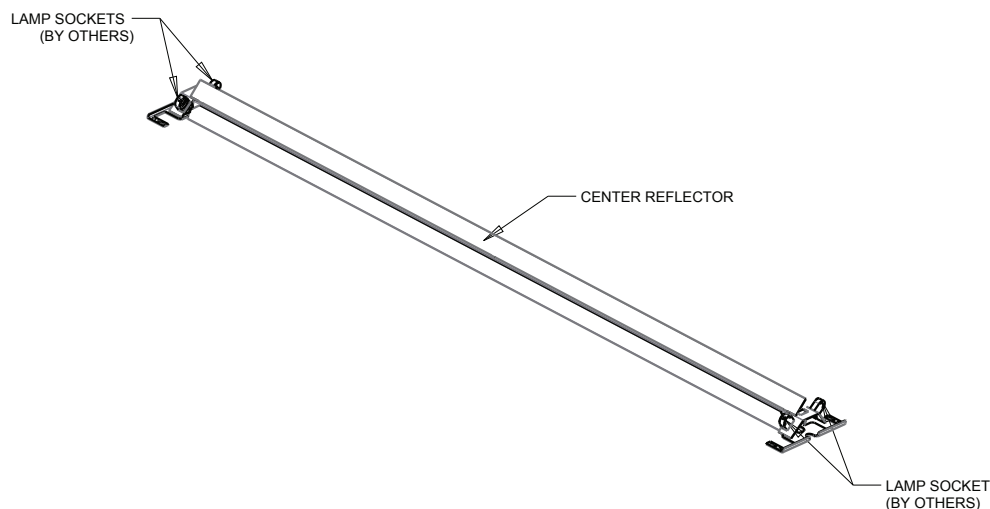

ASSEMBLY INSTRUCTIONS

- 1.) Attach Ballast to the 8-32 Stud provided in the Wire Trough with 8-32 Lock Nut (A).
- 2.) Attach other end of Ballast to the hole provided in the Wire Trough with 8-32 Screw & Lock Nut (A & B).
- 3.) Snap in Lamp Holders to the Bracket.
- 4.) Attach Ballast Cover to Wire Trough (C).
- 5.) Install Center Reflector to back of Trough using the tab and slots provided.

Note: If using 3 Lamps do not use Center Reflector.
3rd Lamp will replace Center Reflector down the center of the Trough.



Adam Metal Products Company • P.O. Box 450 • Ledgewood, NJ • 07852
Phone: 973.770.1100 • Fax: 973.770.1105 • www.adammetal.com

